

Quality, Performance, and Service by Design

Standard Wall Filter Cores




Experience the Sonoco Difference

For over 70 years, **Sonoco** has set the quality standard in filter cores, cages, housings, and other custom filtration components.

Today, the company provides a wide range of filter cores to many segments of the filtration market.

Sonoco Cores Give Your Filters These Benefits:

- ▶ High Collapse Strength
- ▶ High Flow-Through
- ▶ Thermal Stability
- ▶ Chemical Resistance

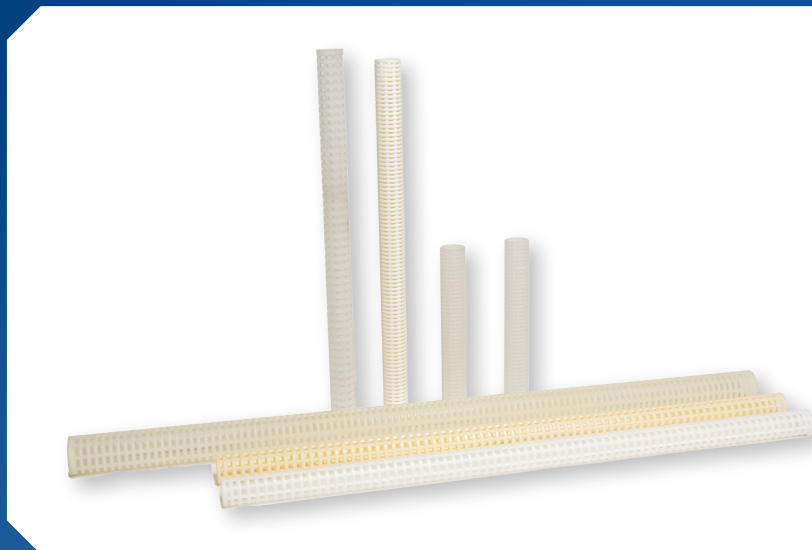


Features:

- 1.093" ID
- 0.105" Wall Thickness
- 23% Flow Through
- Stippled Finish
 - String-Wound and Melt-Blown Filters
 - Aids Retention of Initial Windings

Materials Available:

- Polypropylene
- 40% Glass Filled Polypropylene
- ABS
- Acetal
- 20% Glass Filled Nylon
- Nylon
- Contact Us For More Options

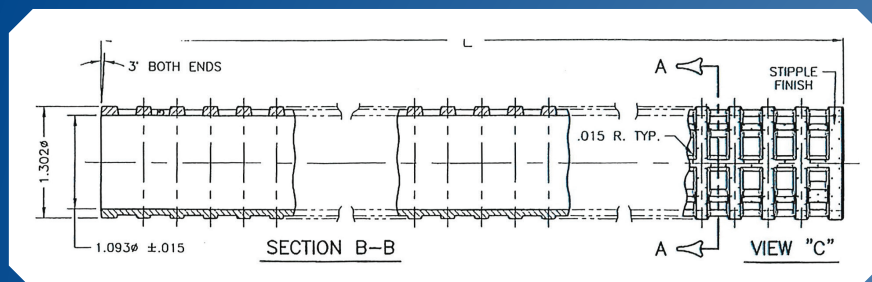

| Nominal | Length | Tolerance |
|-----------------|---------|------------|
| 9-1/2" | 9.500" | +/- 0.015" |
| 9-9/16" | 9.563" | +/- 0.015" |
| 9-5/8" No Slots | 9.695" | +/- 0.015" |
| 9-5/8" Slotted | 9.695" | +/- 0.015" |
| 9-4/5" | 9.816" | +/- 0.015" |
| 19-3/8" | 19.375" | +/- 0.030" |
| 19-4/5" | 19.812" | +/- 0.030" |
| 19-5/8" | 19.625" | +/- 0.030" |
| 19-7/8" | 19.875" | +/- 0.030" |
| 20-1/16" | 20.062" | +/- 0.030" |
| 29-1/8" | 29.125" | +/- 0.040" |
| 29-5/8" | 29.625" | +/- 0.040" |
| 29-7/8" | 29.875" | +/- 0.040" |
| 30-1/16" | 30.062" | +/- 0.040" |
| 39-7/8" | 39.875" | +/- 0.060" |
| 40-1/16" | 40.062" | +/- 0.060" |
| 41" | 41.000" | +/- 0.060" |



North America

1 North Second Street, Hartsville, SC 29550
864 968 3160 | 518 392 1700

sonocoplastics@sonoco.com

To learn more about the advantages of
Sonoco Filter Cores call 518-392-1700 today